


ET SERIES


MULTI-USE UNDERCOUNTER DISHWASHERS

ET... The Dishmachine of Choice, when space is a concern. You will never ever again have to sacrifice production or results.

- **A Commercially Designed Machine for Commercial Applications**
- **Built-in Chemical Feeders**
- **Full 1½ HP (high pressure) Pumps**
- **90 Second Time Cycle with Door Safety Switch**
- **Perfect for Restaurants, Delicatessens and Fast Food Operations**

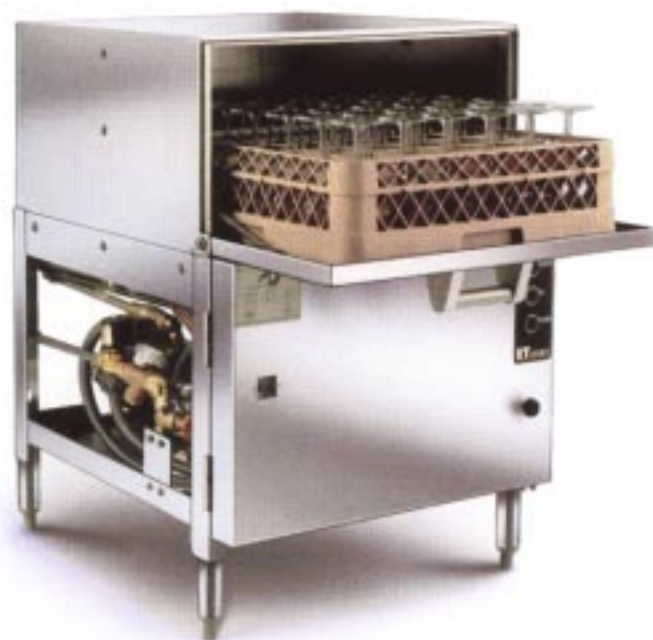

FINALLY, a glasswasher that offers kitchenware results in a bar washing machine. DON'T CUT CORNERS... increase production by utilizing a STANDARD SQUARE GLASS RACK. Bartenders prefer the ET-AF-M with its raised door for convenient operation and the short profile of the loading door. Many operators work right out of the rack, giving them the convenience of a carousel type machine with the results of a dishwasher.

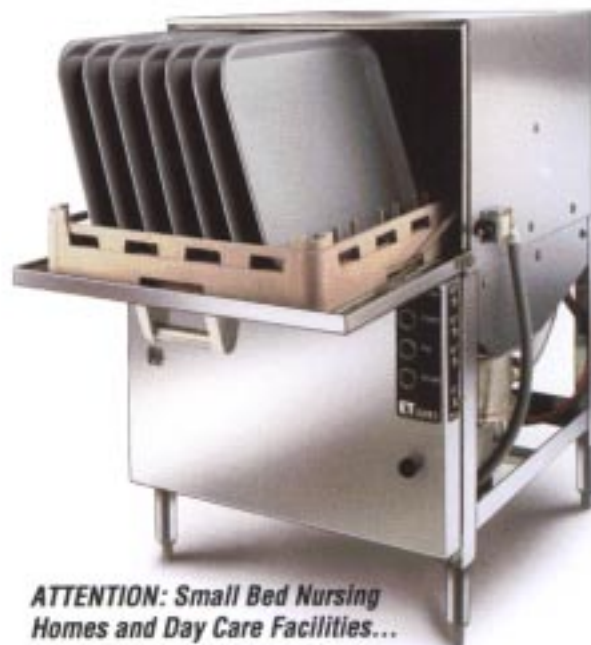

ATTENTION: Small Bed Nursing Homes and Day Care Facilities... Wash and sanitize trays in our ET-AF-3 multi-purpose undercounter machine. Fast, Safe and Effective, it will process over 201 trays per hour. Slightly taller than our regular undercounter with the same notable design features.

When space demands a small dishmachine, don't sacrifice quality or results... Ask for one of the ET-AF UNDERCOUNTERS.



American Dish Service
Manufacturers of Ware Washing Equipment

ET Series

MULTI-USE UNDERCOUNTER DISHWASHERS

1 1/2 HP Wash and Rinse Pump


Prime Switches

Automatic Chemical Feed

90 Second Complete Time Cycle

Hinged Mounted Control Panel for Easy Service Access

Operate a free standing, complete warewashing center in only 48" of space. To do this, combine our ET-AF Undercounter with our stainless steel table package.

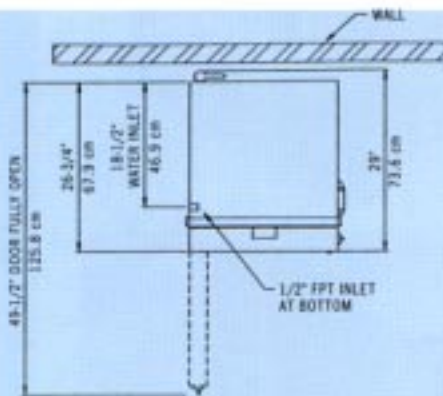

TOP VIEW

CAUTION:

Electrical and plumbing connections should be made by a qualified Service Person who will comply with all available federal, state, and local Health, Electrical, Plumbing, and Safety codes.

*Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

Connect to Supply Source using 10-12 AWG Copper wires using non-time delay fuses of 20 amp rating or 25 amp circuit breaker.



ET Series Specifications

ET-AF

FAMILY MODELS

	ET-AF	ETA	ET-AH
NSF RATED CAPACITY (RACKS/HOUR)	30	24	20
WASH TIME (IN SECONDS)	45	60	75
RINSE TIME (IN SECONDS)	30	45	60
DWELL (IN SECONDS)	15	15	15
TOTAL CYCLE TIME (IN SECONDS)	90	120	150

WATER TEMPERATURE OF SUPPLY WATER (NSF) 120° F. MINIMUM
or 49. Celsius

WATER CONSUMPTION (NSF RATED) 1.7 GALS. PER CYCLE
or 6.4 liters/cycle

MOTOR RATING [1.125 KW] 1.5 HORSEPOWER

ELECTRICAL RATING (NEC) 115 Vac, 20amp breaker, 50/60Hz, 1 phase

RACK SIZE STANDARD 19.75" X 19.75"
or 50.2 x 50.2 cm

DOOR CLEARANCE* 11" TALL x 22.25" WIDE
or 27.9 x 56.5 cm

WATER INLET (1/2") F.P.T.

DRAIN SIZE (1-1/2") F.P.T.

HEIGHT OF STANDARD ET ADJUSTER FEET WILL GIVE MIN: 33.3" MAX: 34.8"
or 84.6 to 88.4 cm

HEIGHT OF ET-AF-3 MIN: 36.3" MAX: 37.8"
or 92.2 to 96.0 cm

WIDTH (OVERALL) 24.8"
or 62.9 cm


DEPTH (OVERALL) 29"
or 73.6 cm

SHIPPING WEIGHT 201 POUNDS
or 91.2 kg

SHIPPING VOLUME (CRATED) 38 CU. FT.
or 1.1 cu meters

*Also available in a 3" Taller Version with 14" x 22.25" (35.8 x 57 cm) door clearance. Model ET-AF-3

Effective 2/1/97

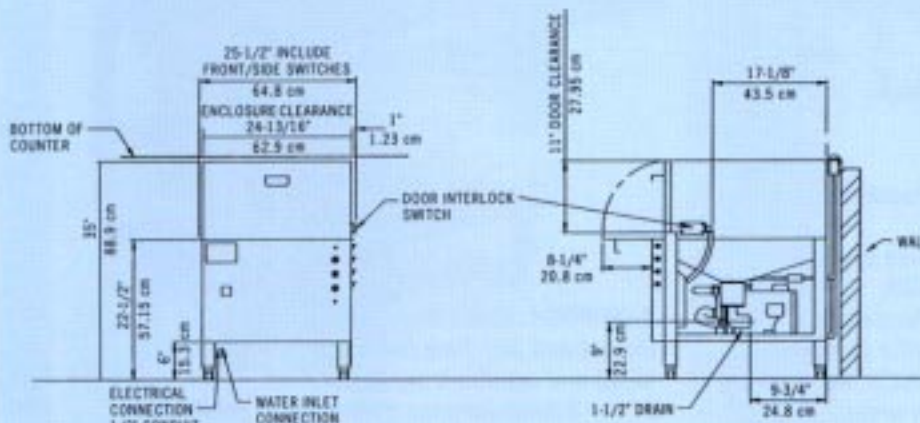

FRONT VIEW

SIDE VIEW

ADS has built a strong history based on Customer Service, Quality and Reliability. A Commitment to Excellence is the driving force behind American Dish Service.

