

**HIGH OR LOW TEMP
THE CHOICE IS YOURS...**



THE ADC-44 CONVEYOR




American Dish Service
Manufacturers of Ware Washing Equipment

900 BLAKE STREET • EDWARDSVILLE, KS 66111-3820 • PHONE (800) 922-2178 • FAX (913) 422-6630



THE ADC-44

- **AUTO-FILL**
- **ENERGY SAVING STAGE WASHER**
- **NO CIRCUIT BOARDS**
- **RACK SAVING CONVEYOR DRIVE**
- **360 SQ. IN. OF WASHING ACTION**
- **HIGH CAPACITY HEATERS**
- **WIDE OPENING ACCESS DOORS WITH SAFETY INTERLOCK**
- **SKIRTED MOTOR COMPARTMENT**
- **HEAVY STAINLESS STEEL CONSTRUCTION**
- **NO OPERATOR CONTROLS**
- **LOW WATER CONSUMPTION**
- **QUIET OPERATION**
- **244 RACKS PER HOUR**
- **AUTO CUT-OFF**
- **SELF-PURGING**
- **11 GALLON WASH TANK**
- **3 HP WASH PUMP**
- **DUAL RINSING SYSTEM**

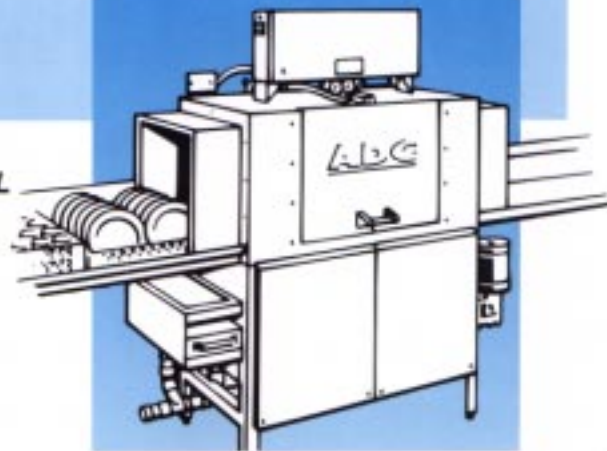

REMEMBER...

All these features are **STANDARD** on the ADC-44. While other manufacturers may offer these same features as "Add-Ons"... at American Dish our machines are **COMPLETE AND READY TO RUN.**

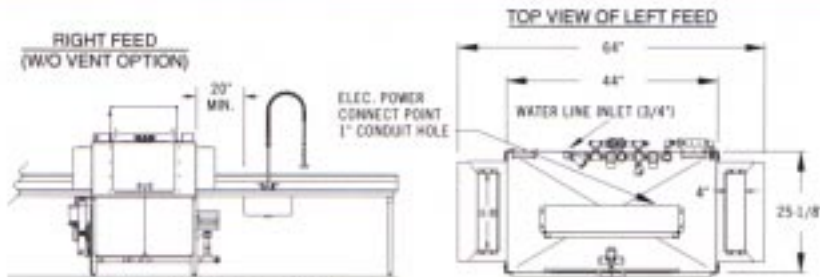

U.S. REGISTERED PATENTS

Model ADC-44 Specifications

ADC-44	FAMILY MODELS (left or right feed)	
	ADC-44 HOT TEMP	ADC-44 CHEMICAL
NSF RATED CAPACITY	244 rack/hr	244 rack/hr
CONVEYOR SPEED	6.8 ft/min or 2.07 meters	6.8 ft/min or 2.07 meters
WATER CONSUMPTION	.49 gal/rack or .12 liter	.49 gal/rack or .12 liter
TOTAL GAL. PER HR.	120 gph or 31.7 liters	120 gph or 31.7 liters
FINAL RINSE TEMP (20 psi)	180° F/48.8 C	120° F/48.8 C
SANITIZER	180° WATER	50ppm CHLORINE
ELECTRICAL POWER SUPPLY	208/240V, 3 PH, (Requires clean circuit)	
MOTOR RATINGS	3HP WASH, 1/3HP RINSE 1/3HP CONVEYOR	
HEATER RATINGS	12KW WASH, 2.25KW RINSE	
RACK SIZE	STANDARD 19.75" x 19.75" or 50.2 x 50.2 cm	
ACCESS DOOR CLEARANCE	15" x 24.5" or 38.1 x 62.2 cm	
RACK CLEARANCE (Through machine)	19.25" x 20.75" or 48.9 x 52.7 cm	
WATER INLET	(3/4") F.P.T.	
DRAIN SIZE	(2") F.P.T.	
HEIGHT (with door open)	73.25"	
	(84.25" or 213.9 cm with control box cover open) or 186 cm	
WIDTH (Overall)	64" or 162.5 cm	
WIDTH, TABLE TO TABLE	44" or 111.7 cm	
DEPTH	29" or 73.7 cm	
SHIPPING WEIGHT	760 POUNDS or 344.7 kg	
SHIPPING VOLUME (CRATED)	121.6 CU. FT. or 3.4 cu meters	

Effective 2/19/97



IMPORTANT NOTES

Both clean and soiled tables are to be bolted to the dishmachine with the 1/4-20 x 1/2" bolts and nuts provided. Leaks cause potential problems in electrical and mechanical areas under the machine. Quick drains (table scuppers) are not compatible with stage type conveyor dishmachines. Scrap sinks shall be no closer than 20" minimum from the dishmachine end of table.

The clean exit table should be at least 72" straight for efficient conveyor operation. Electrical and plumbing connects should be made by a qualified service person who will comply with all appropriate state and local health, electrical, plumbing, and safety codes.

*Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

